




PRODUCT FAMILY SHEET

Columba

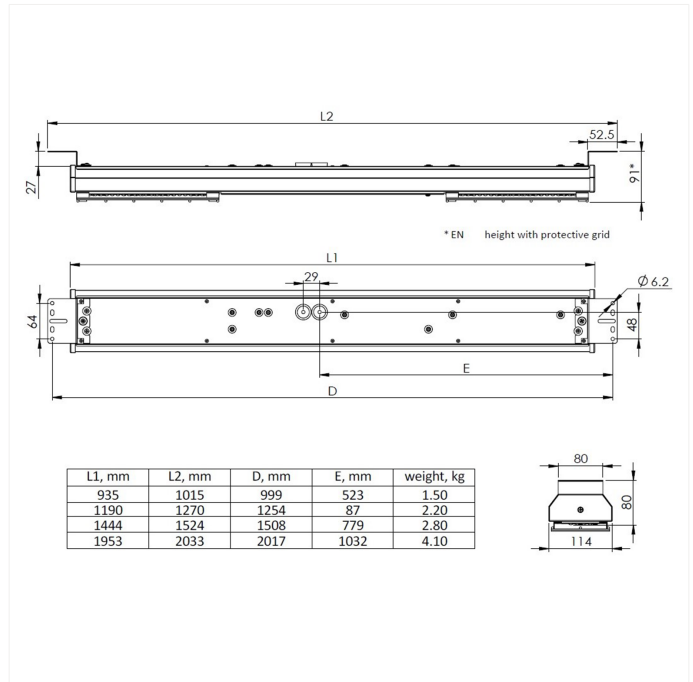

Columba

Surface mounted or suspended LED luminaire for use in industry, warehouse, hall and sports arena.
Choose between various editions with different lumen output, optics and DALI2 driver.

VERSIONS

Art.No	Effect [W]	Cold Lumen [lm]	Lumen Output [lm]	CCT [K]	Beam Angle [°]	Lens Difuser	CRI [>]	Color	Light Control	Connection
5713-04-3-ddd	115		19740	4000	90°x90°		80	Hvit	DALI	
5711-04-3-ddd	59		9921	4000	90°x90°		80	Hvit	DALI	
5714-04-3-ddd	172		29457	4000	90°x90°		80	Hvit	DALI	
5712-04-3-ddd	86		14805	4000	90°x90°		80	Hvit	DALI	
5712-03-3-ddd	86		15627	4000	120°x120°		80	Hvit	DALI	
5713-03-3-ddd	115		20837	4000	120°x120°		80	Hvit	DALI	
5714-03-3-ddd	172		31094	4000	120°x120°		80	Hvit	DALI	
5711-03-3-ddd	59		10472	4000	120°x120°		80	Hvit	DALI	