





## PRODUCT SHEET

PN 280

Art. no: 1392A04

**Ledpro**  
by NORLUX

# PN 280

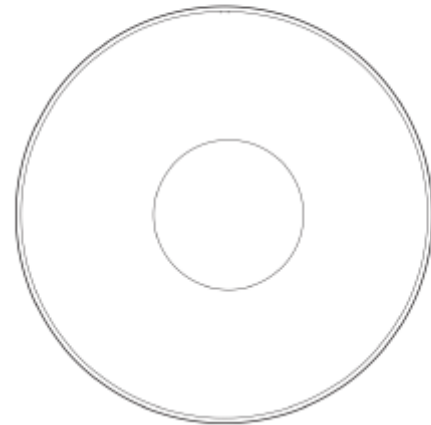

PN 280 is an exterior surface mounted luminaire, designed to integrate the COB LED technology at its best. It is very shallow and it is equipped with an innovative system of passive heat dissipation. Optic's housing in UV resistant clear thermoplastic, with no screws. Textured polycarbonate cover.



### SPECIFICATIONS

Lyskilde :	LED (innebygget)
Systemeffekt [W]:	30W
Fargetemperatur [K]:	4000K
Fargegjengivelse [CRI/Ra]:	85
Lumen ut (lm):	3700lm
Lumen LED (tc=25):	4350lm
Spredningsvinkel [°]:	120°
Dimmetype:	Ingen
Spenning [V]:	230V 50Hz
Tilkobling:	Terminal
Montering:	Utenpåliggende
Forventet Levetid :	L80B10: 50 000h
Farge :	Hvit
Høyde [mm]:	36mm
Diameter [mm]:	280mm
Vekt [kg]:	2kg