





PRODUCT SHEET

Icarus 500lm 927 36° 7W BK phasecut Isosafe 8-pack
Art. no: 101975-36-2




Icarus 500lm 927 36° 7W BK phasecut Isosafe 8-pack

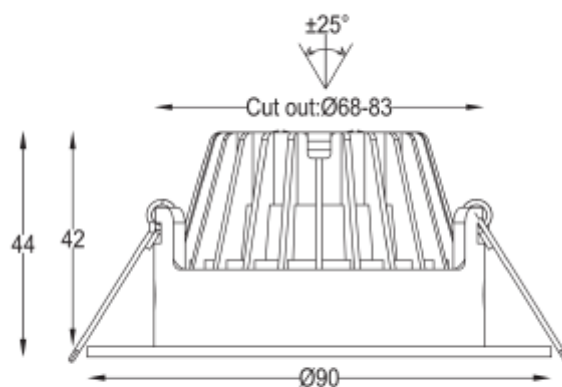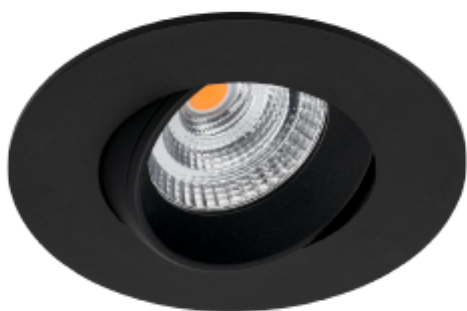

SPECIFICATIONS

Lyskilde :	LED (innebygget)
Systemeffekt [W]:	7W
Fargetemperatur [K]:	2700K
Fargegjengivelse [CRI/Ra]:	95
Lumen ut (lm):	456lm
Lumen LED (tc=25):	500lm
Spredningsvinkel [°]:	36°
Optikk:	Klar
Dimmetype:	Faseavsnitt
Flimmerfri:	Ja
Spenning [V]:	230V 50Hz
Tilkobling:	Hurtigkobling
Montering:	Tak
Utsparring [mm]:	Ø68-83mm
Forventet Levetid :	L80B10: 100 000h
Lumen/W:	62lm/W
UGR (<=):	22
Fargetoleranse [SDCM]:	3
Farge :	Sort
Høyde [mm]:	44mm
Diameter [mm]:	90mm
Vekt [kg]:	0,3kg
Monteres rett i isolasjon:	Yes, recessed in insulation

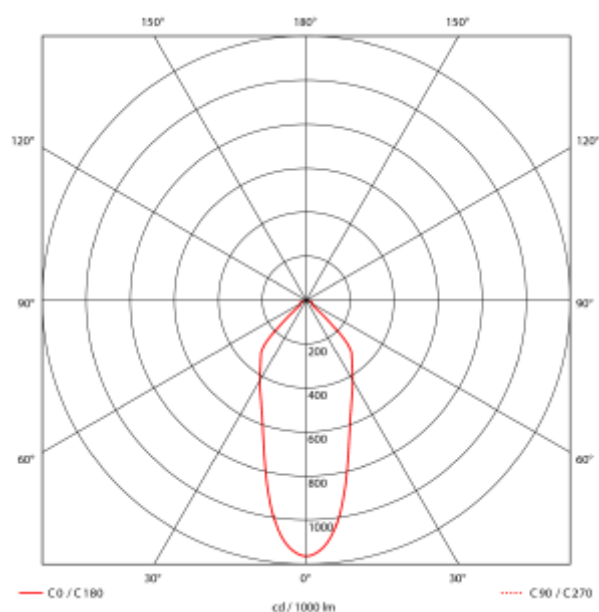

7W downlight i høy kvalitet som kan monteres rett i isolasjon. Med hullmål på Ø68-83mm kan den benyttes til rehabilitering og nybygg. 36° -lysspredningsvinkel og tiltbar 25°. CRI>95 og flimmerfri fasekutt driver. 8-pakning med driver til hver downlight.