




## FDV SPEC SHEET

Matar 500lm 830 0-100° 2x6W Quickconnect Dark Grey

Art. no: 2470-90-7

**Ledpro**  
by NORLUX

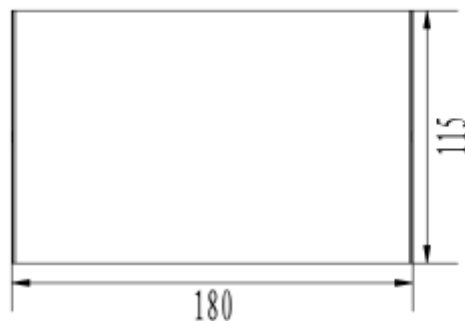

# Matar 500lm 830 0-100° 2x6W Quickconnect Dark Gre



Art. no: 2470-90-7

### LYS TEKNISK

Lumen ut (lm):	420
Lumen LED (tc=25):	500
Spredningsvinkel [°]:	0-100°
Fargetemperatur [K]:	3000
Fargegjengivelse [CRI/Ra]:	80
Fargekode:	830
Optikk:	Klar

### MONTERING / TILKOBLING

Tilkobling:	Hurtigkobling
Montering:	Utenpåliggende, Vegg

### ELEKTRISK DATA

Dimmetype:	Ingen
Systemeffekt [W]:	2x6
Spennning [V]:	230V 50Hz
Isolasjonsklasse:	1
Maks belastning pr kurs - B10:	17
Maks belastning pr kurs - B16:	26
Maks belastning pr kurs - C10:	29
Maks belastning pr kurs - C16:	47
Lekkasjestrøm [mA]:	0,5
Startstrøm I <sub>max</sub> [A]:	15
Startstrøm tid [µs]:	125
Sokkel :	N/A
Strøm LED [mA]:	500
Spennning LED Min [V]:	18
Spennning LED Max [V]:	24



## FDV SPEC SHEET

Matar 500lm 830 0-100° 2x6W Quickconnect Dark Grey

Art. no: 2470-90-7



### PRODUKT

IP-grad:	IP54
Vandal klasse:	IK08
Driftstemperatur [°C]:	-20 - 50
Farge :	Mørk grå
RAL:	RAL7024
Lengde [mm]:	180
Høyde [mm]:	115
Bredde [mm]:	42
Vekt [kg]:	0,86