

Data sheet

Commercial Art.No.: 92.932.3053.0

connector GST18I3S S1CZR1 WS

gesis® CLASSIC connector, number of poles 3, male, connection type screw connection, rated voltage 250 V, rated current 20 A, cable diameter 6.5 - 10.5 mm, color of coding/ contact carrier white



Commercial Art.No.	92.932.3053.0
EAN	4015573721869
Order Unit	1

certificates / approvals



Technical data

general

rated current	20 A
rated voltage	250 V
rated impulse voltage	4 kV
strain relief	yes
pollution degree	2
mechanical coding	code 1
lockable	self-locking (unlocking by tool)
color of coding/ contact carrier	white
Pole codification	L, N, PE
color of housing inclusive strain relief	white
RAL-Nummer Codierung/Kontakteinsatz	9016

connection data

cable diameter max.	10.5 mm
cable diameter min.	6.5 mm
connection cross section solid mm² max.	2.5 mm²
connection cross section solid mm² min.	0.75 mm²
connection cross section fine stranded mm² max.	2.5 mm²
connection cross section fine stranded mm² min.	0.75 mm²
terminations per pole	1
sheath strip length	38.5 mm
wire strip length	7 mm

model

model	male
connection type	screw connection

degree of protection (IP)	IP40
---------------------------	------

material

housing material	polyamide
halogen free	yes
contact material	CuZn
fire load	0.093 kWh/St
insulation components continuous temperature	100 °C
surface finish	tin-plated

dimensions

length	69.4 mm
width	28.2 mm
height	12.6 mm

classification

ECLASS 11	
ECLASS 8.1	27440605
ETIM 9.0	EC002560
ETIM 8.0	EC002560
ETIM 7.0	EC002560
ETIM 6.0	EC002560
ETIM 5.0	EC002560
ETIM 4.0	EC002560

product compliance


ROHS conformity status	compliant/exempted
ROHS exceptions	III-6(c)
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Lead
REACH-SVHC CAS numbers	7439-92-1

Accessories



Commercial Art.No.:	Article-type description:	Description:
05.587.3156.0	lock (G)ST18 WS	Locking device for cable to cable connection GST18i3-5, white
06.561.7853.0	mounting frame GST18i3 SW	Mounting frame to snap in GST18i3 connectors into a housing or furniture. Wall thickness: 1,5-2,5 mm. Holds GST18i3 connectors with screw or spring connection and pre- assembled cables.
05.561.3653.0	cover cap GST18i3VS B WS	Cover piece for female GST18i3, white
05.561.3653.1	cover cap GST18i3VS B SW	Cover piece for female GST18i3, black
05.564.5353.0	cover cap GST18i3/4/5 SW	Cover piece 12 pole black for female parts GST18i3-6
05.564.5353.2	cover cap GST18i3/4/5 WS	Cover piece 12 pole white for female parts GST18i3-6
05.594.4250.0	cover cap ST18/3B + GST18i3 ST WS	
05.594.4253.0	cover cap ST18/3B + GST18i3 ST WS	
05.587.3156.1	lock (G)ST18 SW	Locking device for cable to cable connection GST18i3-5, black

These dimensions will be especially checked at delivery
Only inspection dimensions
With /E marked dimensions are only valid for internal use

Diese Maße werden bei Abnahme besonders geprüft
Ausschließliche Prüfmaße
Mit /E gekennzeichnete Maße sind nur für interne Zwecke gültig

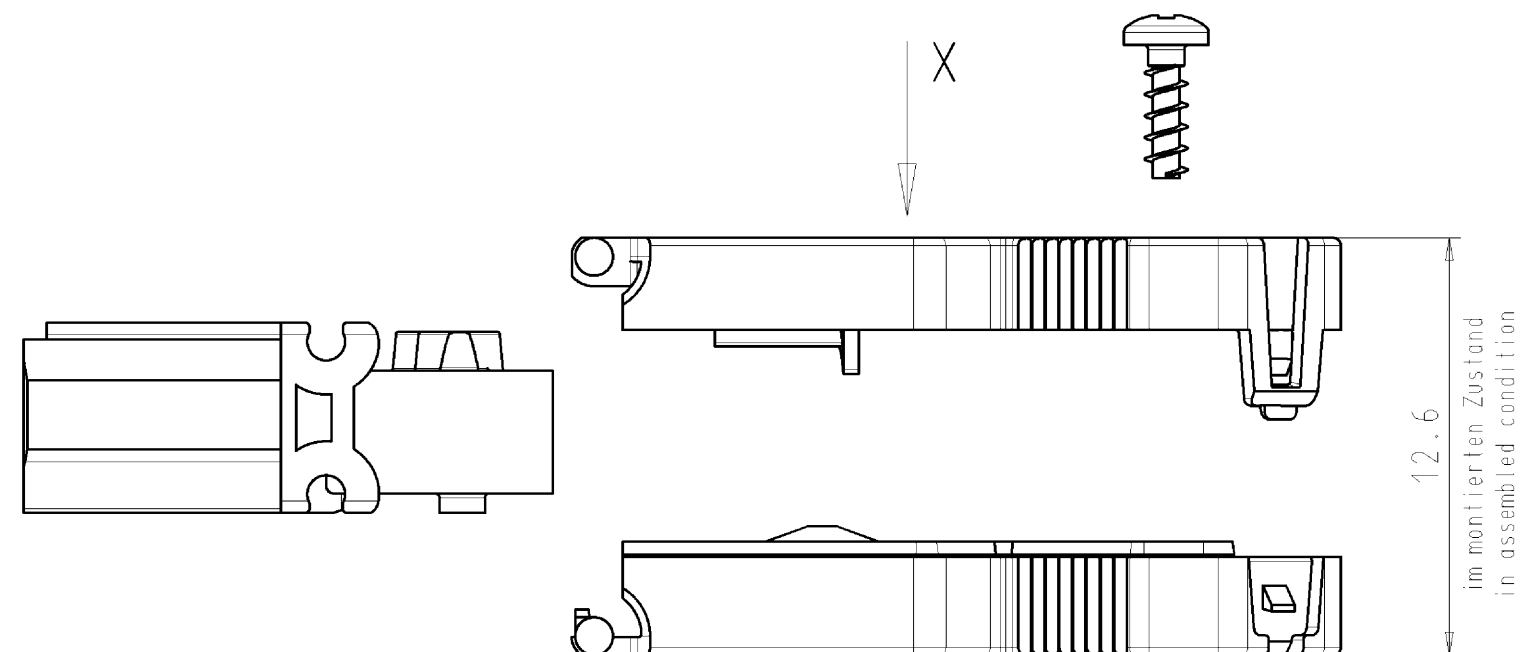


Ansicht in Pfeilrichtung X im montiertem Zustand
view in arrow direction X, drawn in assembled condition

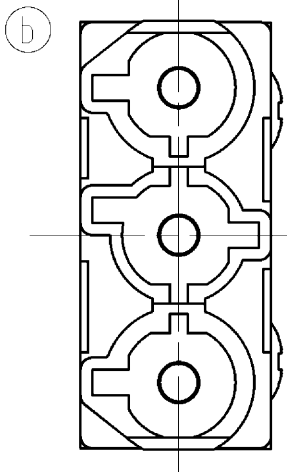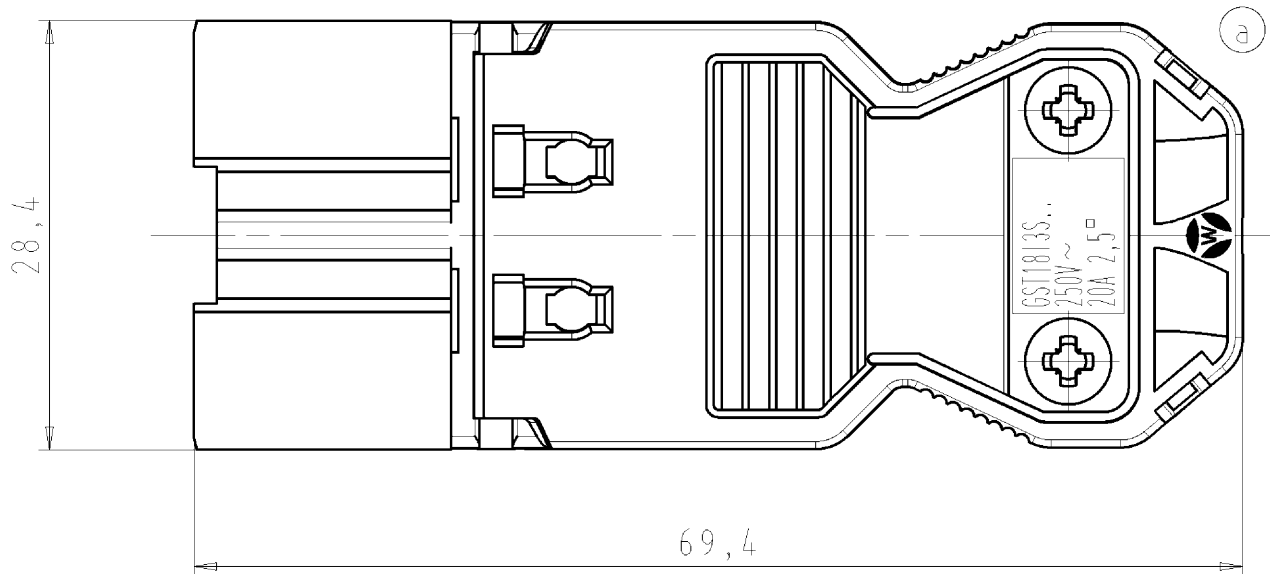

Weitere Daten siehe Katalog
further data see catalog

Teile-Nr. part-no	Farbe colour	Typ type
92.932.3053.0	weiß white	GST1813S S1 ZR1 WS
92.932.3053.1	schwarz black	GST1813S S1 ZR1 SW

M 1:1

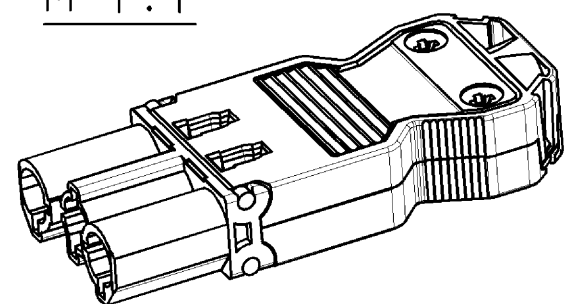

Tolerierung Size ISO 14405/Tolerance system Size ISO 14405. (This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances).					ja/yes ☒ Stoffverbots- und Deklarationsliste nach UU-TQM-05/03 ist einzuhalten. Conformity with Wieland document UU-TQM-05/03 (list of prohibited / dearable hazardous substances) to be declared!				
Freitoleranz nach - General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1. Verwendung: - First Use:		Blatt: 1 von 1 Sheet: of	
			Werkstoff/Material		2005	Tag/Date	Name	Zeichnung Nr./Drawing No. Index T 92.932.3053.0 01K b	
					gezeichnet drawn	22.09.	Schmitt J.		
			Maßstab/Scale		geprüft checked	-	-		
			X		Normgepr. Stand. check	-	-		
			Vol. mm³ Ofl./Surf. mm²		Ersatz für/Replacement for: -				
b	21.01.2013/		wieland		Type		Benennung/Title MALE CONNECTOR WITH STRAIN RELIEF		
a	22.10.2012/				s. Tabelle see table		STECKERTEIL MIT ZUGENTLASTUNG		
Index	Datum / Blatt Date / Sheet				Install.-Steckverb. m. Schraubanschl./connector with screw connection				
Änderung/Revision								a 250V AC 20A 2,5qmm	

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.

929323053001K_2 CADW3029 Schmitt: 2013-01-21 T08:36:40 1.000 OU-PEM-08/91b