




FDV SPEC SHEET


Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH

Art. no: 2117-110-3

Ledpro
by NORLUX

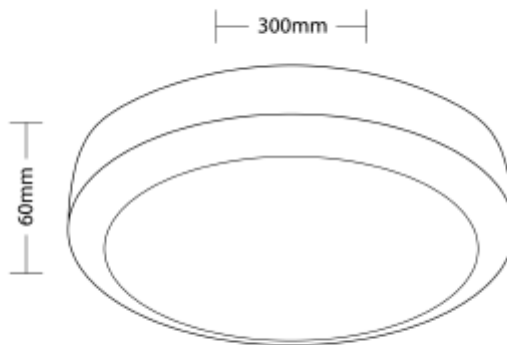

Alhena 1500lm 830/840/857 Switch 110° 15W IP65 WH



Art. no: 2117-110-3

LYS TEKNISK

Lyskilde :	LED (innebygget)
Lumen ut (lm):	1318 (3000K)
Lumen LED (tc=25):	1500
Spredningsvinkel [°]:	110°
Fargetemperatur [K]:	3/4/5700
Fargegjengivelse [CRI/Ra]:	80
Fargekode:	830/840/857
Fargetoleranse [SDCM]:	3
Optikk:	Opal

MONTERING / TILKOBLING

Tilkobling:	Hurtigkobling
Montering:	Tak, Utenpåliggende

PRODUKT

IP-grad:	IP65
Vandal klasse:	IK08
Driftstemperatur [°C]:	-20 - 45
Forventet Levetid :	L80B50: 50 000
Farge :	Hvit
Høyde [mm]:	60
Bredde [mm]:	300

ELEKTRISK DATA

Dimmetype:	Ingen
Systemeffekt [W]:	15
Spennning [V]:	230V 50Hz
Isolasjonsklasse:	2
Maks belastning pr kurs - B10:	83
Maks belastning pr kurs - B16:	133
Maks belastning pr kurs - C10:	83
Maks belastning pr kurs - C16:	133
Startstrøm I _{max} [A]:	25,6
Startstrøm tid [µs]:	20
Sokkel :	N/A
Spennning LED Min [V]:	25
Spennning LED Max [V]:	42